FTD-ID(RS)T-0257-88

THE FILE COPY

FOREIGN TECHNOLOGY DIVISION



THE VIBRATIONAL RELAXATION PROCESSES IN A ${\rm CO_2-n_2-H_2O}$ LASER SYSTEM

bу

AD-A196 860

Yan Haixing





Approved for public release; Distribution unlimited.

88 8 08 067

HUMAN TRANSLATION

FTD-ID(RS)T-0257-88

13 July 1988

MICROFICHE NR: FTD-88-C-000550

THE VIBRATIONAL RELAXATION PROCESSES IN A ${\rm CO_2-N_2-H_2O}$ LASER SYSTEM

By: Yan Haixing

English pages: 17

Source: Jiguang, Vol. 8, Nr. 6, 1981, pp. 1-8

Country of origin: China Translated by: FLS, Inc.

F33657-85-D-2079

Requester: FTD/TQTD

Approved for public release; Distribution unlimited.

THIS TRANSLATION IS A RENDITION OF THE ORIGINAL FOREIGN TEXT WITHOUT ANY ANALYTICAL OR EDITORIAL COMMENT. STATEMENTS OR THEORIES ADVOCATED OR IMPLIED ARE THOSE OF THE SOURCE AND DO NOT NECESSARILY REFLECT THE POSITION OR OPINION OF THE FOREIGN TECHNOLOGY DIVISION.

PREPARED BY:

TRANSLATION DIVISION FOREIGN TECHNOLOGY DIVISION WPAFB, OHIO.

GRAPHICS DISCLAIMER

All figures, graphics, tables, equations, etc. merged into this translation were extracted from the best quality copy available.

The Vibrational Relaxation Processes in a CO -N -H O Laser System . 2 2 2

by Yan Haixing (Institute of Mechanics, Academia Sinica)

Paper received on November 6, 1979; C. N. West 1

Vibrational relaxation processes and data of a CONTRO! laser system up to the present are surveyed. The data before 1988 are based on Taylor & Bitterman's review. The data are treated with weighted least square method to get the best fit in the form of logik - A+BX+CX+DX: and the corresponding coefficients are presented. Using these best fits of data and relaxation model with three modes and four vibrational temperatures which is based on the present work, numerical calculation results of small signal gain of GDL agree with experiments, thus eliminating the error introduced by the uncertainties of relaxation data and model.

I. Preface

The relaxation process of the vibrational degree-of-freedom inside molecules has a great effect on the fields of high speed gasdynamics [3], atmospheric physics [4], acoustics [5], chemodynamics [6~8] and so forth. In the past ten years, a series of research concerning the vibrational relaxation process was widely conducted. A series of papers [9~13] as well as review articles [1, 14~17] were presented. The relaxation process has created a key effect on gas laser application. Without sufficient

knowledge about this relaxation process, it is impossible to invent a new laser system, to improve device performance or to conduct analysis of the laser dynamic process. Laser technology development requires in-depth understanding about the relaxation process; however, it itself has become a powerful measuring tool for the relaxation process experiment.

At the beginning of 1969, a review concerning the vibrational relaxation process of a CO -N laser system was presented by Taylor and Bitterman [1]. This review is still widely recommended today; however, it lacks data for many important relaxation processes because of the research level at that time. process and analysis were imperfect which made some of the rate data inaccurate; moveover, some important problems in the relaxation process of the system were not thoroughly studied. Since 1969, a wealth of data were accumulated for the relaxation process of the CO -N -H O laser system. In order to calculate the performance of a gas dynamics laser (GDL), some new data were collected and used [18,19]; however, no detailed analysis for the relaxation process was performed. The quantity of collected data was also little; only some very imperfect rate values were presented, and thus the calculation results of the GDL performance showed large errors [2].

Based on Reference [1], all new experiment data and analytical results from then until the present are further collected and processed; the best curve fits and analytical formula for various

INSPECTED 2

prat Checina

relaxation rates are presented, and thus can be easily to used. The best curve fits presented in this paper extend the data applicable range, and point out the major difference from the Ref. [1] results. Good results are also obtained by applying this paper's results to the non-equilibrium calculation of a burning type GDL. This means that the reliability of this paper's results is again proved from an additional aspect.

II. Relaxation Mechanism

The energy exchanging reactions considered here are (see Fig. 1):

V-T exchange:

CONTRACT	00,+00,+em	1/cm	(1)
CO5(p2)+N	CO ₅ +N ₅ +667	1/cm	(2)
605(pg)+Hg	0 == 2 00s + H ₂ O + 667	1/cm	(3)
	· ************************************	1/cm	(4)
30+00	#22 %,+00 ₈ +2881	1/cm	(5)
N°+H ₂ O	₩,+H,O+2881	1/cm	(6)

Intermolecule V-V exchange:

$$\mathbf{CO_2^*(r_2)} + \mathbf{N_2} \qquad \mathbf{CO_2} + \mathbf{N_2^*} + \mathbf{18} \qquad 1/\mathrm{cm} \qquad (7)$$

V-V exchange inside molecule:

$$\cos(r_0) + \cos \cos(r_0 + r_0) + \cos + 272 \text{ 1/cm}$$
 (8)

$$CO_2(r_2) + N_2 \implies CO_2(r_1 + r_2) + N_2 + 272 \quad 1/cm$$
 (9)

$$O((n) + HD) = O((n+n) + HO + 272 1/cm$$
 (10)

$$CO_2^{\bullet}(\nu_1) + M \longrightarrow CO_2^{\bullet \bullet}(\nu_2) + M + 102 \qquad 1/cm \qquad (11)$$

where * represents the vibrational energy particle; the symbol inside the brackets indicates the CO vibration mode. The energy difference is taken from translation or rotation.

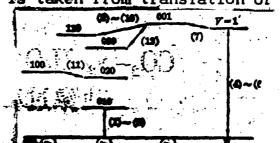


Fig. 1 Illustration of the energy level of a CO -N laser system.

Only a few of the lower vibrational energy levels of the system are presented in the formulae and figures. If the relaxation equation of vibrational energy is used to describe the system, the effects of all similar processes can be included [20]; if an equation which considers the particle number only at the lowest energy level is used to describe the relaxation process,

errors can occur. However, for the temperature range ((1500K) in which we are interested, this approximation is acceptable.

The relaxation mechanism of a molecule system is extremely complicated. Herzfeld [11] has analytically calculated in detail for the CO system based on the SSH theory [5] and gives the 2 jumping probability for all possible processes. However, the experiment results indicate that the SSH theory has a lot of constraints. The fact is that the jumping probability among various vibrational states is difficult to measure directly, and many people are currently devoting themselves to determining the relaxation mechanism indirectly by using a laser method. The property mechanism is adopted to study the V-V exchange inside a CO (property) molecule while the processes.

$$\frac{\text{CO}_{5}^{*}(\nu_{3}) + M}{\rightleftharpoons \text{CO}_{5}^{**}(\nu_{3}) + M + 416} \qquad 1/\text{cm} \qquad (12)$$

$$(M - \text{CO}_{5}, N_{5}, H_{5}O)$$

Under an equilibrium condition between $O_{2}(r_{1})$ and $O_{2}(r_{2})$ modes, it can be proved that there exists a simple relation between the rates in Equation (8) to (10) and (12) [22],

$$\mathbf{K}[O8(1\to 0), O2(0\to 8), M] \\
= \frac{(1-e^{-b\sqrt{2}})^{2}}{1-e^{-b/2}} \\
\times \mathbf{K}[O8(1\to 0), O1(0\to 1), \\
O2(0\to 1), M]$$
(13)

where θ_i is a vibrational characteristic temperature. Thus only

the reaction rates of Equation (8) to (10) are given here.

From the experiment data analysis, it shows that the rate of

$$H_0 + OO_0 \longrightarrow H_0 + OO_0(p_0, p_0) + \Delta B \tag{14}$$

is zero in the error range [23], thus it is ignored.

III Experiment and Data Process

There are many experimental methods for studying vibrational relaxation. The most common methods are a shock tube (compressible flow), laser fluorescence, laser photosound, ultrasound, expansion flow in a shock tube, collision tube,

etc..

The relaxation rate is a microscopic datum which describes one of the characteristics of a molecular vibrational energy level and cannot be measured directly from experiments. The measurement in an experiment is some sort of macroscopic physical quantity which has a close relation to the relaxation process of interior degree-of-freedom. A certain theoretical analysis is necessary to connect the experiment data (such as decay constant or total relaxation time) with the relaxation rate of some processes. Obviously, the speed accuracy also depends on data process in addition to the experiment itself.

The Schafer formula for the V-T rate of a multi-atom molecule [24] is-always used,

$$\boxed{ \overline{\tau_1 - \tau_2} \times \frac{O_1}{\sum O_i} }$$
 (15)

where the subscript 1 represents the mode of "control relaxation rate"; C is the vibrational specific heat. Study [22] shows in that this formula is good only when the V-V rate in the system is much greater than the V-T rate, a "control rate"; however, the actual V-V rate is not sufficiently large. The error is certainly introduced when the Schafer formula is adopted, especially under the condition of small specific heat. This error, however, is small in a CO system.

The V-V rate process was recently developed. Under the condition of a pure CO and CO -H O mixture, the decay 2 2 2 constants, k, which is measured by a shock tube experiment [25] performed by Taylor and Bitterman, and the laser fluorescence experiment carried by Rosser et. al. [23, 26] are then converted to rate coefficient through the formula,

$$K[C3(1\to 0), C2(0\to 3); M] = \frac{k}{2b}$$
 (16)

Based on the common form of the relaxation equations [20], a relaxation mechanism is analyzed. A solution is also obtained by solving a set of relaxation equations [22],

$$K = \frac{kK[O2(1\to 0), O] - k^{2}(1+c)}{[K[O2(1\to 0), O]]}$$

$$= kK[O2(1\to 0), O] - k^{2}(1+c)$$

where

According to Ref. [20], the factor 2 in the Taylor and Bitterman formula is combined into the constant K. If the K[C2(1--0)] in Equation (17) is much greater than k, it can be reduced to Equation (16). This is the exact approximation adopted by Taylor,

The unit of rate K used in this paper is cm /molecule sec.

The relation between K and the jumping probability P, the formula which converts various relaxation experiment data to K, and those necessary physical constants are listed in Reference [1].

IV Relaxation Speed Data

Since the vibrational relaxation time is short, and the requirements of the experiment (such as impurity content) are strict, the data measured from experiments often show large errors; some time these errors are one or two orders of magnitude. According to the data reliability and experiment accuracy analyses, a certain weight is added to various data measured by different authors, and then a weighted least square method is used to get the best fit in the form of

$$\log_{10} K = A + BX + CX^2 + DX^2 \tag{21}$$

(all calculations are performed in a state-made computer TQ-16). According to Landau-Teller and SSH theory, generally, the X is -1/3 chosen as T . Under a high temperature condition, should -1/3 be linear to T .

Table 1 Best fitting coefficients


(1)	(2)						(3)
Control of the second	进率	X	100 4 0 10	B /	С	D	温度范围
$(1)^{2} \mathcal{O}_{2}(\nu_{1} \rightarrow T) - \mathcal{O}_{2}$	K	7-1/3	-7.22788741	-77.0945460	203.852916	0	150~7000
$ (2) (\nu_2 \rightarrow T) - N_3 $	II K	T-1/8	-9.18704456	-42.4606794	46.4011141	0	150~1500
(a) (0) (v ₃ →T) −H ₂ O	K	T-1/8	-9.827809	-25.22588	125.6784	0	300~1000
(4) M ₃ (V→T) −N ₃	K	T-1/3	-5.38873	-189.0598	88.50646	1412.096	240~4700
(8) $N_2(V \rightarrow T) - CO_2$	K	T-1/3	-5.38878	-139.0598	88.50646	1412.096	240~4700
(6) N ₂ (V→T) -H ₂ O	K	T-1/3	-10.9754595	-21.7181799	0	0	290~3000
$O_2(\nu_2) \longrightarrow N_2$	K	10-2-T	-12.0624762	-0.098057182	5.539994×10-	-6.277332×10	5150 ~2600
A THE STREET	Krs	T-1/8	-9.25928286	-4.69827095	-470.105702	1980 79807	150~1600
(20) (12-21/2+12) - CO3	K	2-1/5	-9.7767526	2.92817157	-504.993077	1978.16692	150~1600
€ © ₂ (ν ₃ →ν ₁ +ν ₂) − N ₂	Krs	T-1/3	5.61975614	-847,252296	2057.64558	-4288.96898	160~1600
	K	T-1/3	7.42712189	-890.990028	2387 .44778	-5029.38366	160~1600
(16) OO ₂ (\(\nu_3 \rightarrow \nu_1 + \nu_2\) - H ₂ O	Krs	T-1/3	-14.1877762	38.1508547	-159.940244	0	300~1000
	K	T-1/3	-18.8868956	38.8333884	-144.499031	0	300~1000
(11) CO ₂ (\(\nu_1 \rightarrow 2\nu_2\) - CO ₂	λ_{K}	T	-13.07233	0.00137838	0	0	300~1000
	换区	快点 认为 K~1.25×10−11,且不随温度改变(6)					300, 400
(11) (CO ₂ (\(\nu_1 \rightarrow 2\(\nu_2\)) - N ₃	一种认为与 CO₂(ν ₁ → 2ν₂) - CO₂ 的速率近似福等 (7),					400	
	另一种认为是 00。(+10-1) -00。的追求的 0.46 会 [8]					400	
(11) (O)(1-1-1-)-E(0	以工政策(5)						


Key: (1) Process; (2) Rate; (3) Temperature range; (4) Slow K11(5) Fast K; (6) Considered as K=1.25x10 , and not varied with temperature; (7) Considered as equal to the $\frac{(0)_{(\nu_1 \rightarrow 2\nu_2) - (0)_2}}{(0)_{(\nu_1 \rightarrow 2\nu_2) - (0)_2}}$ rate; (8) Considered as 0.46 time of $\frac{(0)_{(\nu_1 \rightarrow 2\nu_2) - (0)_2}}{(0)_{(\nu_1 \rightarrow 2\nu_2) - (0)_2}}$ rate; (9) Lack of data.


14 (14) 1 (2007) With 1 (2007) 1 (10) 1 (10)


The best fit coefficient is list in Table 1. Figure 2 to 10 are plots of the relation between rate coefficients and temperatures.


Anderson [18] investigated the effects of various relaxation rate uncertainties on the GDL performance by using his simplified relaxation model and the base of the linear relaxation equation. He concluded that the reactions of Equation (3), (10), (6) and (9) have the most effect.

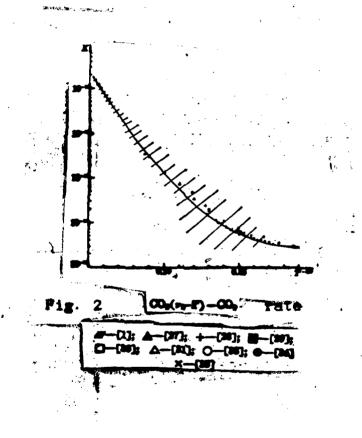


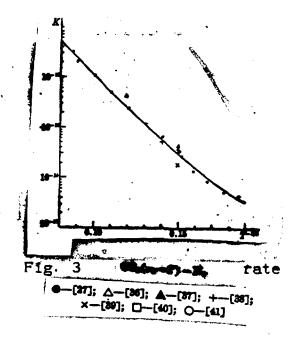


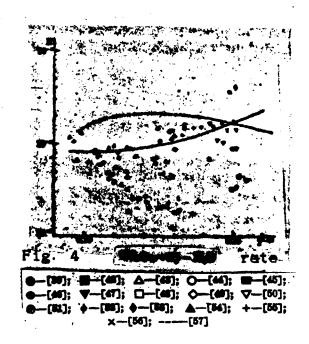


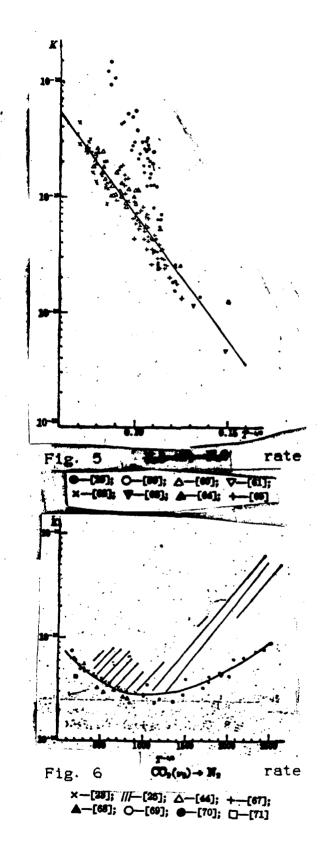

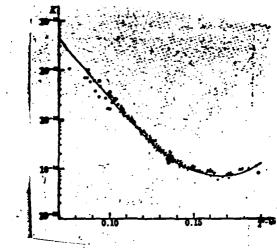

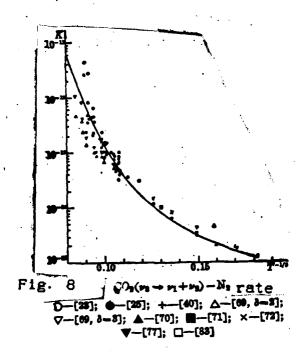

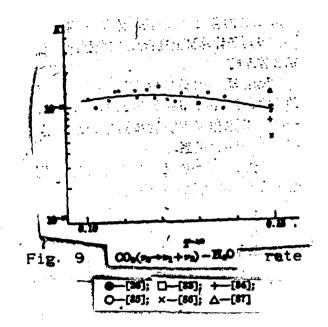

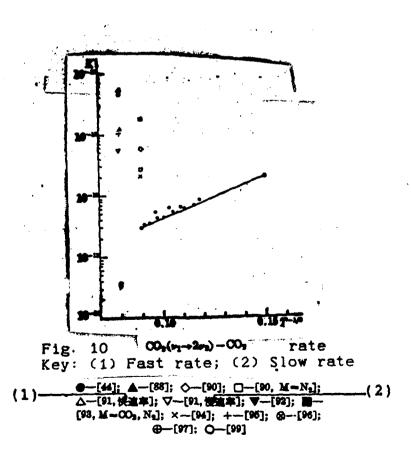

References:

- [1] Taylor R. L., Bitterman S.; Rev. Mod. Phys., 1909, 41, No. 1, 26.
- [2] 产海星,陈丽吟;《力学学报》,1978, No. 4, 274.
- [3] Charke J. F., McChesney M.; Dynamics of Balaxing Gases, 2ed ed., Butterworths, London (1976); Clarke J. F.; Rep. Prog. Phys., 1978, 41, Mo. 6, 807.
- [4] McGowan J. Wm. (ed.); Adv. Chem. Phys., 1975, 28, Interscience, New York.
- [5] Hersfeld K. F., Litovits T. A.; Absorption and Dispersion of Ultrasonic Waves, Academic Press, New York (1959).
- [6] Moore C. B. (ed.); Chemical and Biochemical Applications of Lasers, 1~8, Academic Press, New York (1974~1977).
- [7] Zardy D. C., Rabinovitch B. S.; Chem. Rev., 1977, 77, No. 8, 369.
- [\$] Кондратьсе В. Н., Никитин Е. Е.; Кинетина и механизм газофазных реакций, Наука, Моские (1974).
- [9] Cottrell T. L., McCoubrey J. C.; Molecular Energy Transfer in Gases, Butterworths, London (1961).
- ры) Ступеченно В. В. и др., Репансационные процессы в ударных возных, Наука, Москва (1965).
- Burnett G. M., North A. M. (ed.); Transfer and Storage of Energy by Molecules 2: Vibrational Energy, Wiley-Interscience, (1969).
- [13] Levine R. D., Jortner J.; Molecular Energy Transfer, Wiley, London (1975).
- [15] Lambert J. D.; Vibrational and Rotational Relaxation in Gases, Oxford Univ. Press (1977).
- [14] Rich J. W., Treanor C. E.; Annu. Rev. Fluid Mech., 1970, 2, 355.
- [15] Moore C. B.; Adv. Chem. Phys., 1978, 23, 41.
- [16] Topmen i pp.; YDH, 1972, 188, Je 4, 655.
- [17] Gait P. D.; Annu. Rep. Chem. Soc. (London) 78, Section A, (1976) 5.
- [16] Andrews J. B. Joy 4544 J., 1974, 12, 394, 28, 2844 Janes (1974); AZAA Pages 18-174.

- [19] Brunner M. J.; AD-783218, (1974).
- [20] 广海里;《散光》, 1979, 6, No. 10, 1.
- [21] Hernfald K. P.; J. Chem. Phys., 1967, 47, No. 2, 743.
- [23] 广海星;《力学学报》,1980, No. 8, 319.
- [26] Bosser W. A., Jr. Jret al.; J. Chem. Phys., 1969,
 80, No. 11, 4996; J. Chem. Phys., 1971, 84, No.
 9, 4181.
- [24] Schäfer K.; Z. Phys. Chom., 1940, B46, 212; 亦 见[9] pp 26~29.
- [25] Taylor B. L., Bitterman S.; Proc. 7th Shock Tube Symp., (1969), 577; J. Chem. Phys., 1969, 30, No. 4, 1720; 亦见[1].
- [36] Bosser W. A. Jr., Gerry E. T.; J. Chem. Phys., 1969, 51, No. 5, 2286.
- [37] Simpson C. J. S. M., Chandler T. R. D.; Proc.
 Boy. Soc., 1970, A317, No. 1529, 265.
- [28] Shields F. D.; J. Acoust. Soc. Am., 1970, 47, No. 5, pt. 2, 1262.
- [29] Bass H. E.; J. Chem. Phys., 1973, 58, No. 11, 4788; J. Chem. Phys., 1973, 58, No. 9, 3837.
- [30] Chocogena II. B.; Onm. u oneum., 1973, 34, 16. 4, 678.
- [31] Cannemeijer F., De Vries A. E.; Physics, 1978,
 64, No. 1, 128.
- [27] Eckstrom D. J., Bershader D.; J. Chem. Phys., 1970, 53, No. 7, 2978.
- [33] Allen D. C. et al.; Chem. Phys. Lett., 1977, 45, No. 1, 183.
- [36] Lepoutre F. et al.; Chem. Phys. Lett., 1977, 48, No. 8, 509.
- [38] Babino A.; Thèse, Paris VI(1976). 转引自[38].
- [36] Shields F. D. et al.; J. Chem. Phys., 1978, 26, No. 9, 8837.
- [87] Merrill K. M., Amme R. C.; J. Chem. Phys., 1969, 51, No. 2, 844.
- [36] Baner H. J., Schotter R.; J. Chem. Phys., 1966, 55, 36. 8, 2961.
- [909] Musta-Anhert M., Chavalier P.; Adv. Mcl. Mcl. Mcl. Mcl. Processes, 1970, No. 2, 101.
- [60] Communifor F. et al.; Physica, 1974, 74, 196.
- [41] Simpson C. J. S. M., Gait P. D.; Chem. Phys. Lett., 1977, 47, No. 1, 188.
- [42] Lewis J. W. L., Lee K. P., J. Acoust. Soc. Am., 1965, 38, No. 5, 813.
- [48] Buchwald M. I., Bauer S. H.; J. Phys. Chem., 1972, 76, No. 22,8108.
- [44] Bulthuis K.; J. Chem. Phys., 1978, 88, No. 12, 5786; Chem. Phys. Lett., 1978, 21, No. 2, 415.
- [45] Read A. W.; Progr. Reaction Kinetics, 1965, 8,

References: (continued)

- 303; 亦见 [39].
- [46] Cheo P. K;; Bull. Am. Phys. Soc., 1968, 13, 207; 亦见 [1].
- [47] Eucken A., Becker R.; Z. Phys. Chem., 1935, 27B; 235. 转引自[1].
- [66] Bucken A., Numann E.; Z. Phys. Chem., 1937, 555, 168. 神引自[1].
- [48] Van Itterbeek A. et ci.; Physics, 1989, 6, 511. 特引自[1].
- [50] Van Itterbeek A., Mariens P.; Physica, 1940, 7, 125. 转引自[1].
- [51] Smiley E. F., Winkler E. H.; J. Chem. Phys., 1954, 22, 2018. 转引自[1].
- [186] Knudsen C. V. O., Fricke E.; J. Acoust. Soc. Am., 1940, 12, 255. 转引自 [1].
- [186] Metter I. M.; Phys. Z. Sowjetunion, 1937, 12, 233. 特引自[1].
- [54] Higgs R. W., Torborg R. N.; J. Acoust. Soc. Am., 1967, 42, 1038. 转引自 [1].
- [55] Pielemeier W. H.; J. Acoust. Soc. Am., 1943, 15, 22. 转引自[1].
- [56] Gutowki F. A.; J. Acoust. Soc. Am., 1956, 28, 478. 特引自[1].
- [W] Sharma R. D.; J. Chem. Phys., 1971, 54, 810.
- [36] Benson S. W., Berand G. C.; J. Chem. Phys., 1966, 44, No. 470, 4247.
- (38) Huber P. W., Kantrowitz A.; J. Chem. Phys., 1947, 15, No. 5, 275.
- [86] von Rosenberg C. W. Jr., et al.; J. Chem. Phys., 1972, 56, No. 7, 3230.
- [61] Evans L. B.; J. Acoust. Soc. Am., 1972, 51, No. 1, pt. 2, 409.
- [66] Center R. E., Newton J. E.; J. Chem. Phys. 1978, 63, No. 8, 3327; 亦见 1975, 62, No. 6, 2187
- [66] · Piercy J. E.; J. Acoust. Soc. Am., 1971, 49, 110(a). 特引自 [62].
- [86] Whitson M. E., McNeal R.; J. Chem. Phys., 1977, 96, No. 6, 2696.
- [66] Sharma B. D., Brau C. A.; J. Chem. Phys., 1969, 50, No. 2, 924.
- [67] Henri G. et al.; C. B., 1971, 272B, No. 19, 1139.
- [68] Christophe B. M., Offenberger A. A.; Can. J. Phys., 1972, 50, No. 4, 368.
- [69] Sato Y., Tsuchiya S.; J. Phys. Soc. Jop., 1972, 28, 1120; 亦见 Chom. Phys. Lett., 1970, 5, 293.
- [70] Inous G., Tsuchiya S.; J. Phys. Soc. Jap., 1975,

- 39, No. 2, 479.
- [71] Bass H. E., Hoffman S. D.; J. Chem. Phys., 1977, 67, No. 12, 5966,
- [72] Rao Y. V. C. et al.; Chem. Phys. Lett., 1972, 17, No. 4, 581.
- [78] Stephenson J. C., Moore C. B.; J. Chem. Phys., 1970, 52, No. 5, 2838.
- [74] Secry D. J.; J. Chem. Phys., 1972, 56, 681.
- [75] Gower M. C., Carswell A. I.; Appl. Phys. Lett., 1972, 21, No. 11, 556.
- [76] Hinchen J. J.; UAC. 转引自[43].
- [77] Бирювов А. С. и др., ЖПС, 1972, 16, 249.
- [78] Henri G. et al.; C. B., 1972, 274B, No. 7, 482.
- [79] Alexander J. A. F. et al.; Proc. Phys. Soc., Ser. 2, 1968, 1, No. 6, 1225.
- [80] Starr D. F., Hancock J. K.; J. Chem. Phys., 1975, 63, No. 11, 4780.
- [81] Lepoutre F. et al.; Chem. Phys. Lett., 1977, 46, No. 3, 509.
- [82] Chakroum A. et al.; C. R., 1975, 281B, No. 1, 29.
- [83] Henderson M. C. et al.; J. Acoust. Soc. Ass., 1969, 45, No. 1, 109.
- [84] Moore C. B. et al.; J. Chem. Phys., 1969, 46, No. 11, 4222.
- [85] Heller D. F., Moore C. B.; J. Chem. Phys., 1970, 52, No. 2, 1005.
- [86] Emposos A. C. m gp., 259749, 1970, 50, 1513.
- [87] Cheo. P. K.; IEEE J. Quant. Electr., 1968, QE-4, No. 10, 587.
- [88] Rhodes C. K. et al.; J. Chem. Phys., 1968, 48, 5730.
- [89] Sharma R. D.; J. Chem. Phys., 1968, 49, No. 11, 5195.
- [90] Stark E. E. Jr.; Appl. Phys. Lett., 1978; 23, No. 6, 335.
- [91] DeTemple T. A. et al.; Appl. Phys. Lett., 1973, 22, No. 8, 349.
- [92] Rosser W. A., Jr. et al.; J. Chem. Phys., 1972, 57, No. 10, 4158.
- [98] Jacobs R. R. et al.; Phys. Rev., 1975, A-11, 54.
- [94] Illies F. M., Onm. u oneum., 1976, 41, 365, 882.
- [95] Douglas-Hamilton D. H. et al.; J. Appl Phys., 1975, 46, No. 8, 3566.
- [96] Manes K. R., Seguin H. J.; J. Appl. Phys., 1972, 43, No. 12, 5073.
- [97] Murray E. B. et al.; J.Chem. Phys., 1975, 62, No. 2, 388.
- [98] Seeber K. N.; J. Chem. Phys., 1971, 55, 5077.
- [99] Marriott R.; Proc. Phys. Soc. Lond., 1984, 84, 877; 1986, 88, 83.

DISTRIBUTION LIST

DISTRIBUTION DIRECT TO RECIPIENT

ORGANIZATION	MICROFICHE
A205 DMAHTC	1
A210 DMAAC	1
C509 BALLISTIC RES LAB	1
C510 R&T LABS/AVEADCOM	1
C513 ARRADOOM	1
CS35 AVRADCOM/TSARCOM	1
C539 TRASANA	1
C591 FSTC	4
C619 MIA REDSTONE	1
DOOR MISC	1
E053 HQ USAF/INET	1
E404 AEDC/DOF	1
E408 AFWL	1
E410 AD/IND	1
E429 SD/IND	1
POO5 DOE/ISA/DDI	1
P050 CIA/OCR/ADD/SD	2
AFIT/LDE	1
FID	
ocv _	1
MIA/PHS	1
LLYL/CODE L-389	1
NASA/NST-44	• 1
NSA/T513/TDL	2
ASD/FTD/TQLA	Ī
FST./NTY=3	1